

Fuseholder Open Design, 14.3 x 51 mm, Screw Clamp, red



380 VAC/DC · 5 W/50 A



NNO

### Description

- This product is phased-out without alternate Type. Availability upon request.
- With lock and safety calibration
- Screw or rivet fastening

### References

This type is Phase-out without alternate type  
Last order date: 17.06.2011  
Fuseholder to [MC](#)


### Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Fuse-Link	14.3 x 51 mm	Soldering Methods	Wave <a href="#">Soldering Profile</a>
Mounting	Screw	Contact Resistance	< mΩ at 20 mV
Mounting	Screw or Rivet	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Screw clamps	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	380 VAC/DC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated current	50 A	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Rated Power Acceptance IEC	5 W / 50 A @ Ta 23 °C	Dump Heat	acc. to NF C 20-604
Degree of Protection	IP 00	Climatic Composite	acc. to NF C 20-610 Phase 1-2-3-5
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140		
Admissible Ambient Air Temp.	-5 °C to 70 °C		
Climatic Category	5/070/21 acc. to IEC 60068-1		
Material: Socket	Thermoset, red		
Unit Weight	102 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Rated voltage, Rated current		

### Dimension

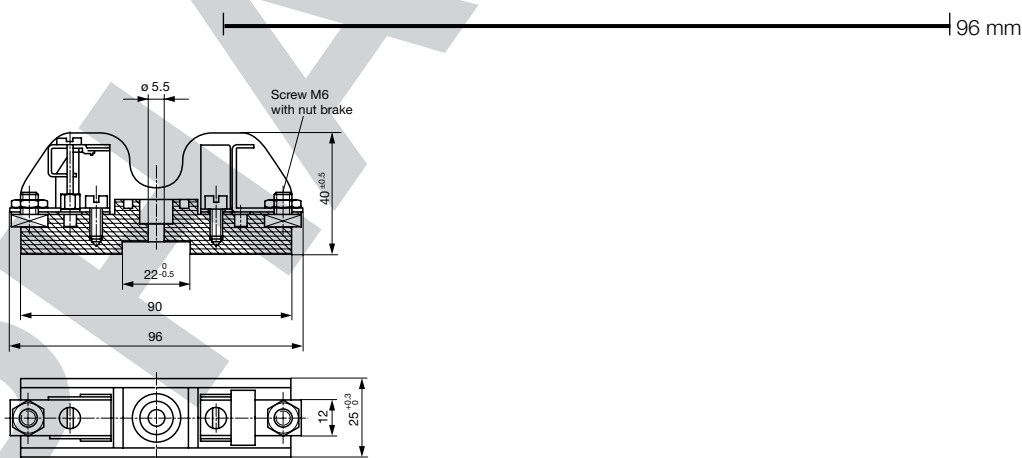

**Packaging Unit** Bulk (100 pcs.)