

IEC Appliance Inlet C24, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal



Snap-in version

C24



70° C



**Description**

- Panel Mount :  
Snap-in , from front side
- Appliance Inlet , Pin temperature 70 °C , Protection class II
- Solder terminals or quick connect terminals

**Approvals**

- VDE Certificate Number: 40030341
- UL File Number: E96454
- CCC File Number: 2012010204559501

**Other versions on request**

- Types for enhanced glow wire test requirements acc. IEC 60695-2-12 and -13 for the use in unattended household equipment acc. IEC 60335-1

**References**

This type is Phase-out. Alternate type: [4793](#)  
Last order date: 31.08.2015

**Weblinks**

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)


**Technical Data**

Ratings IEC	16A / 250VAC; 50Hz	appliance inlet/-outlet	C24 acc. to IEC 60320-1,
Ratings UL/CSA	20A / 250VAC; 60Hz		UL 498, CSA C22.2 no. 42 (for cold
Dielectric Strength	> 2 kVAC between L-N (1 min/50Hz)		conditions) pin-temperature 70 °C, 16A,
Allowable Operation Temperature	-25 °C to 70 °C		Protection Class II
IP-Protection	from front side IP 30 acc. to IEC 60529		
Insulation cover	Suitable for appliances with protection class II acc. to IEC 61140		
Terminal	Solder terminals or quick connect terminals		
Panel Thickness s	Snap-in: 1/1.2/1.5/2/2.5/3 mm		
Material: Housing	Thermoplastic, black, UL 94V-0		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimensions**

4794

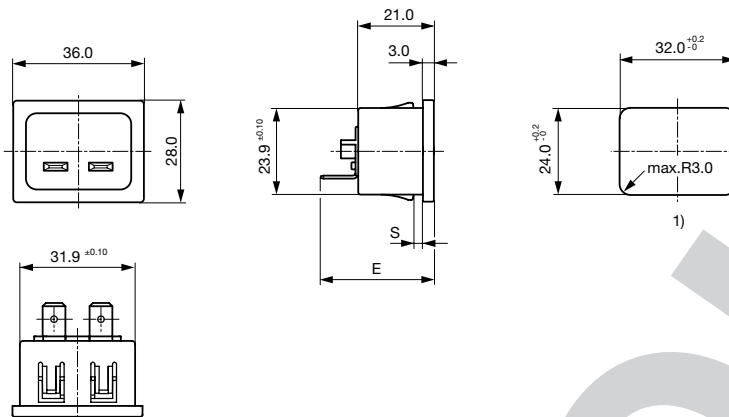

1) Panel cut-out

E: Solder terminals: 28.5 mm

E: Quick connect terminals 6.3 x 0.8 mm: 31.5 mm

**All Variants**

Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
Snap-in	1.5	Quick connect terminals 6.3 x 0.8 mm	4794.4000
Snap-in	1.5	Solder terminals	4794.4200

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Articles for enhanced glow wire test requirements acc. IEC 60695-2-12 and -13 can be ordered with ending ".15" (xxxx.xxx.15). They are suitable for the use in unattended household equipment acc. IEC 60335-1.

**Packaging unit**

100 Pcs

**Accessories****Description**

Assorted Covers  
Rear Cover



Cord retaining kits  
Cord retaining strain relief

### Mating Outlets/Connectors

#### Category / Description



[Connector Overview complete](#)

IEC Connector C19, Rewireable, Straight	4795
IEC Connector C19, Rewireable, Angled	4790
IEC Connector C19, Rewireable, Straight	0104U

[Connector further types to 4794](#)

PHASE-OUT