AC Filter for PCB Mounting





Shield made of nickel-silver

Shield

See below:

Approvals and Compliances

Description

- Line filter in standard and medical version

Characteristics

- Ultra-compact design
- Shield available separately (German silver)
- Suitable for use in equipment according to IEC/UL 62368-1 Suitable for use in medical equipment according to IEC/UL 60601-1 (1 MOOP, 1 MOPP)

References

Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite

Technical Data	
Ratings IEC	1 - 10 A @ Ta 40 °C / 250 VAC; 50 Hz
Ratings UL/CSA	1 - 10 A @ Ta 40 °C / 125 VAC; 60 Hz
Leakage Current	standard < 0.5 mA (250 V / 60 Hz) medical < 5 µA (250 V / 60 Hz)
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temperature	-25 °C to 85 °C
Climatic Category	25/085/21 acc. to IEC 60068-1
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	For PCB mounting tin-plated
Material	Thermoplastic, UL 94V-0

Line Filter	Standard and Medical Version, IEC
	60939, UL 1283, CSA C22.2 no. 8 Technical Details
MTBF	> 5'900'000h acc. to MIL-HB-217 F

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: 5500

	Approval Logo	Certificates	Certification Body	Description
•	1 10	VDE Approvals	VDE	Certificate Number: 101307
(: 71 °us	UL Approvals	UL	UR File Number: E72928

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference
<u>IEC</u>	Designed according to	IEC 61058-1	Switches for appliances. Part 1. General requirements
(UL)	Designed according to	UL 1283	Passive filters for suppressing electromagnetic interference
CSA Group	Designed according to	CSA C22.2 no. 8	Electromagnetic interference (EMI) filters

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC.</u>	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
<u>IEC</u>	Suitable for applications acc.	IEC 60601-1	Medical electrical equipment - Part 1: General requirements for basic safety and essential performance


Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
T	Medical Equipment	SCHURTER AG	Suitable for use in medical equipment according to IEC/UL 60601-1 (1 MOOP, 1 MOPP)


Dimension [mm]


Line Filter

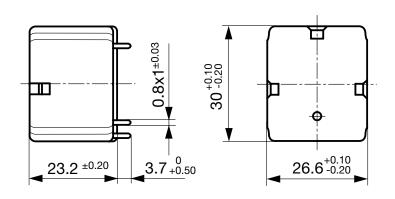




1600 A / 520 V








Technical Data of Filter-Components


Filter-Type	Inductances L [mH]	Capacitance CX [nF]	Capacitance CY [nF]	R [M Ω]
Standard version	2 x 11	47	2.2	-
Standard version	2 x 4	47	2.2	-
Standard version	2 x 1.6	47	2.2	-
Standard version	2 x 0.7	47	2.2	-
Standard version	2 x 0.6	47	2.2	-
Standard version	2 x 0.4	47	2.2	-
Medical Version (M5)	2 x 11	47	-	1
Medical Version (M5)	2 x 4	47	-	1
Medical Version (M5)	2 x 1.6	47	-	1
Medical Version (M5)	2 x 0.7	47	-	1
Medical Version (M5)	2 x 0.6	47	-	1
Medical Version (M5)	2 x 0.4	47	-	1
	Standard version Standard version Standard version Standard version Standard version Medical Version (M5)	Standard version 2 x 11 Standard version 2 x 4 Standard version 2 x 0.7 Standard version 2 x 0.6 Standard version 2 x 0.4 Medical Version (M5) 2 x 11 Medical Version (M5) 2 x 4 Medical Version (M5) 2 x 1.6 Medical Version (M5) 2 x 0.7 Medical Version (M5) 2 x 0.7 Medical Version (M5) 2 x 0.6	Standard version 2 x 11 47 Standard version 2 x 4 47 Standard version 2 x 1.6 47 Standard version 2 x 0.7 47 Standard version 2 x 0.6 47 Standard version 2 x 0.4 47 Medical Version (M5) 2 x 11 47 Medical Version (M5) 2 x 1.6 47 Medical Version (M5) 2 x 0.7 47 Medical Version (M5) 2 x 0.7 47 Medical Version (M5) 2 x 0.6 47	Standard version 2 x 11 47 2.2 Standard version 2 x 4 47 2.2 Standard version 2 x 1.6 47 2.2 Standard version 2 x 0.7 47 2.2 Standard version 2 x 0.6 47 2.2 Standard version 2 x 0.4 47 2.2 Medical Version (M5) 2 x 11 47 - Medical Version (M5) 2 x 4 47 - Medical Version (M5) 2 x 1.6 47 - Medical Version (M5) 2 x 0.7 47 - Medical Version (M5) 2 x 0.7 47 - Medical Version (M5) 2 x 0.6 47 -

Diagrams

Standard version

Medical Version (M5)

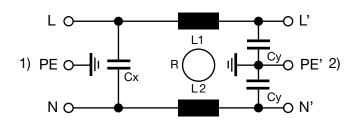




1) Line 2) Load 1) Line 2) Load


Attenuation Loss

Standard version


1 A



2 A




4 A




6 A


- - - - 50Ω differential mode _____ 50Ω common mode



8 A




10 A




Medical version (M5)


1 A




2 A




4 A




6 A



8 A



10 A



All Variants

Rated Current [A]	Filter-Type	EMC-Shielding	Weight [g]	Order Number
-	-	Shield	20 g	5500.0001
1	Standard version	Without EMC-shield	35 g	5500.0155.1
2	Standard version	Without EMC-shield	35 g	5500.0255.1
4	Standard version	Without EMC-shield	35 g	5500.0455.1
6	Standard version	Without EMC-shield	35 g	5500.0655.1
8	Standard version	Without EMC-shield	40 g	5500.0855.1
10	Standard version	Without EMC-shield	35 g	5500.1055.1
1	Medical Version (M5)	Without EMC-shield	35 g	5500.0155.3
2	Medical Version (M5)	Without EMC-shield	35 g	5500.0255.3
4	Medical Version (M5)	Without EMC-shield	35 g	5500.0455.3
6	Medical Version (M5)	Without EMC-shield	35 g	5500.0655.3
8	Medical Version (M5)	Without EMC-shield	35 g	5500.0855.3
10	Medical Version (M5)	Without EMC-shield	35 g	5500.1055.3

Availability for all products can be searched real-time: https://www.schurter.com/en/info-center/support-tools/stock-check-distributors

Packaging unit

100 Pcs