Compensated High Current Choke, 1-phase



See below:

Approvals and Compliances

Description

- Current compensated choke
- 1-phase choke
- Flexible wire
- Flange for mounting onto printed circuit board
- Fully potted resign

Applications

- Placed in front of frequency converter
- Stepper motor drives
- UPS-systems
- Inverter

References

Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product

Te			

Rated voltage	up to 540 VAC
	up to 760 VDC
	UL 250 VAC
Rated Current	10 - 50 A @ Ta 40 °C
Rated inductance	1.1 - 12mH, Tol30% +50%
Power Operating Frequency	50 / 60 Hz
Terminal Type	Flexible wire
Weight	145 - 1865g
Material	UL 94V-0
Sealing Compound	UL 94V-0

Test Voltage	2.5 kV, 50 Hz, 2 sec, winding to winding				
Isolation Voltage	2.5 kV, 50 Hz, 2 sec, winding to ambient				
Climatic Category	25/100/21 acc. to IEC 60068-1				
Allowable Operation Temp.	-25°C to 100°C				

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: DKIP

Approval Logo Certificates **Certification Body** Description **UL Approvals** UL UR File Number: C**FL**° IIS

Application standards

Application standards where the product can be used

Organization Design Description Standard Suitable for applications acc. IEC/UL 62368-1 Audio/video, information and communication technology equipment - Part **IEC** 1: Safety requirements

Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm]

Case 29-2W

Case 31-2W

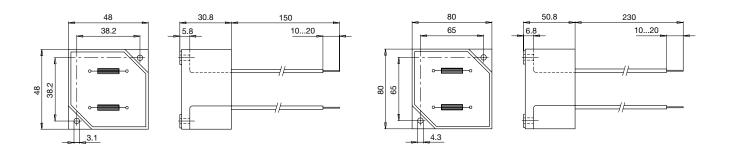


Case 33-2W

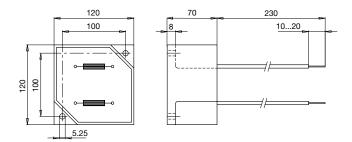


Impedance curves










DKIP_0233_xxxx



All Variants

I _n [A]	L _n [mH]	R _{cu} [mΩ]	Power Dissipation [W]	f _{RES} [MHz]	Copper ø [mm]	Weight [g]	Housing	Packing unit [pcs.]	Order Number	
10	5	18	3.6	0.35	1.25	145 g	29-2W	12	DKIP-0229-1005	
15	2	8	3.6	0.6	1.6	145 g	29-2W	12	DKIP-0229-1502	
20	1.1	6	4.8	2.5	1.8	145 g	29-2W	12	DKIP-0229-2001	
10	12	40	8	0.15	1.25	477 g	31-2W	2	DKIP-0231-1012	
15	5	17	7.6	0.33	1.6	525 g	31-2W	2	DKIP-0231-1505	
20	3	10	8	0.55	1.8	506 g	31-2W	2	DKIP-0231-2003	
30	5	12.5	22.5	0.26	2.24	1600 g	33-2W	1	DKIP-0233-3005	
40	3	6	19.2	0.3	1.5 x 4.5	1830 g	33-2W	1	DKIP-0233-4003	
50	2	5	25	0.25	1.5 x 4.5	1865 g	33-2W	1	DKIP-0233-5002	

Most Popular.

 $Availability for all products can be searched real-time: \\ https://www.schurter.com/en/info-center/support-tools/stock-check-distributors$

EMC Products