

Fuse NH-DIN3-DIN3C 400V (gG)



DIN 3 C 1301.0425



DIN 3 1301.0420

See below:  
[Approvals and Compliances](#)

**Description**

- According to IEC 269
- According VDE 0636
- energy saving
- Selectivity 1:1.6
- Removal tags energized
- Dimensions according to DIN 43620

**Unique Selling Proposition**

- Characteristic gG
- Full-range fuse-links for general applications

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [Detailed request for product](#)

**Technical Data**

Rated Current In	315- 630A
Rated Voltage	400 VAC
Breaking Capacity	100kA
Rated Power Operating Frequency fe	50Hz

Contact blade	Full contact blades, Cu silvered
Characteristic resistance	even with alternating load; nonagin to VDE 0636
Indicator	Combi indicator

**Basic Design**

Insulator	Ceramics
Metal components	corrosion-resistant (rustproof)

**Power Dissipation (Watt) operating temperature max.**

The power dissipation is the so called power loss at rated current load and operation temperature acc. VDE 0636 . It is to be measured in Watt at AC condition. The voltage tap is to be assured that the power dissipation of the blade contacts are included. This means the measure contact need to be applied at the ends of the blade contacts. The standard VDE 0636 part 1 and 2 requires that following maximal permissible power losses are not exceeded.

**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

**Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

Approval Logo	Certificates	Certification Body	Description
	<a href="#">VDE Approvals</a>	VDE	VDE Certificate Number: 40052737

**Application standards**

Application standards where the product can be used


Organization	Design	Standard	Description
VDE	Suitable for applications acc.	VDE Certificate Number:	840403289

## Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

## Dimensions [mm]

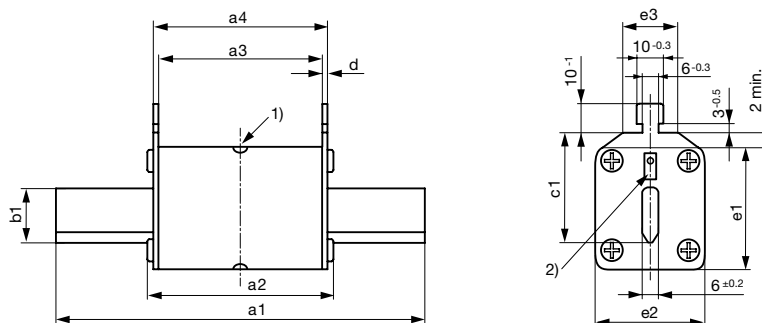


DIN	a1	a2	a3	a4	b1	c1	d	e1	e2	e3
3	150 ±2,5	75 -10	62 ±2,5	68 ±2,5	32 +0,2	60 ±0,8	2,5 +1,5/-0,5	72	72 -2,8	20 +5/-2
3C	150 ±2,5	75 -10	62 ±2,5	68 ±2,5	25 +0,2	60 ±0,8	2,5 +1,5/-0,5	59	50 ±0,70	20 +5/-2

- 1) Centre indicator
- 2) Flat indicator


## Time-Current-Curves

DIN3 315 - 630 A, 400V

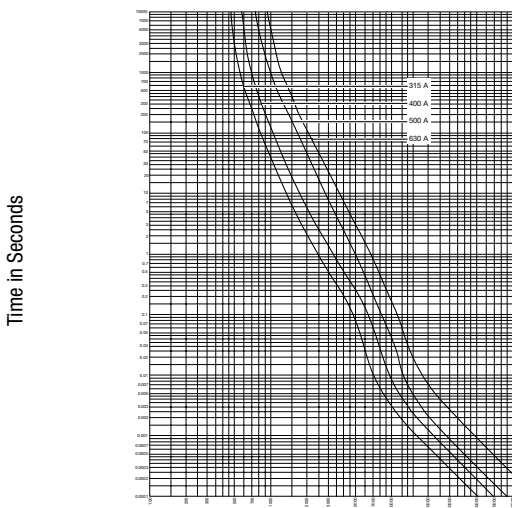

Effective value of the melting current (A) + - 8%

## Current limiting diagram

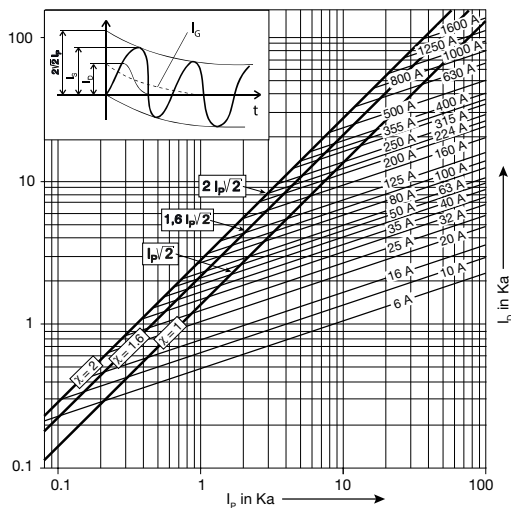

The prospective short circuit current is the value of the current, that would flow if there was no protection in the circuit.

- ID Let-through current
- IG Value of DC component
- IP Prospective short-circuit current
- IS Short-circuit peak current
- X Factor (X=2 für cosφ=0, X=1 für cosφ=1)

All Variants

Rated current [A]	Style [Compact]	Power Loss [W]	Order Number	E-No.
315	C	19.8	1301.0423	840403289
355	C	22.1	1301.0424	840403299 <sup>1)</sup>
400	C	25.1	1301.0425	840403309
500	-	31.1	1301.0420	840603319
630	-	39	1301.0421	840603339

<sup>1)</sup> without VDE approvals

■ Most Popular.

Availability for all products can be searched real-time:<https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit

3 Pcs